


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

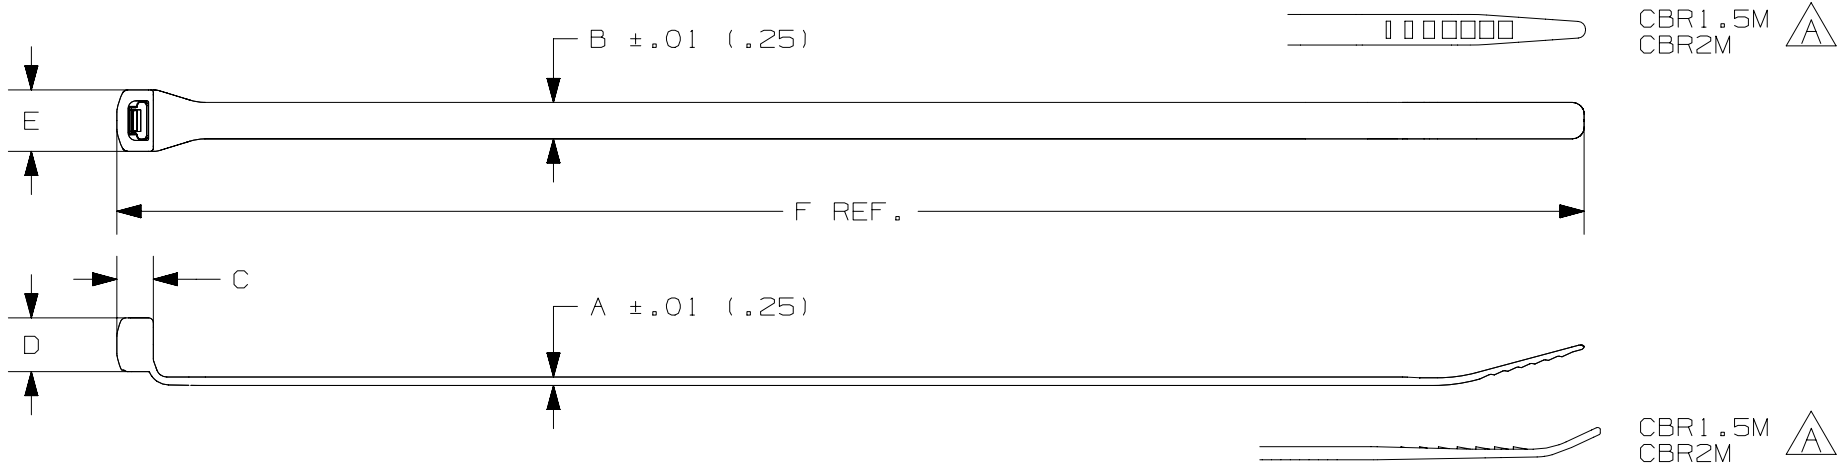

PANDUIT * PART NO.	BUNDLE DIA.		A in. (mm)	B in. (mm)	C in. (mm)	D in. (mm)	E in. (mm)	F in. (mm)	MIN. LOOP TENSILE lbs (N)	CROSS- SECTION	WEIGHT lbs/100pcs (g)
	MIN in (mm)	MAX in (mm)									
CBR1M	.070 (1.8)	1.0 (25.4)	.038 (1.0)	.098 (2.5)	.140 (3.6)	.208 (5.3)	.195 (5.0)	4.1 (104.1)	18 (80)	MINIATURE	.061 (27.7)
CBR1.5M	.070 (1.8)	1.5 (38.1)	.042 (1.1)	.098 (2.5)	.146 (3.7)	.208 (5.3)	.209 (5.3)	5.8 (147.3)	18 (80)	MINIATURE	.084 (38.3)
CBR2M	.070 (1.8)	2.0 (50.8)	.042 (1.1)	.098 (2.5)	.146 (3.7)	.208 (5.3)	.209 (5.3)	7.3 (185.4)	18 (80)	MINIATURE	.108 (48.8)
CBR1.5I	.070 (1.8)	1.5 (38.1)	.040 (1.0)	.140 (3.6)	.180 (4.6)	.250 (6.4)	.250 (6.4)	5.9 (149.9)	40 (178)	INTERMEDIATE	.129 (58.5)
CBR3I	.070 (1.8)	3.0 (76.2)	.052 (1.3)	.140 (3.6)	.192 (4.9)	.250 (6.4)	.262 (6.7)	10.4 (264.2)	40 (178)	INTERMEDIATE	.26 (119.3)
CBR4I	.070 (1.8)	4.0 (101.6)	.052 (1.3)	.140 (3.6)	.192 (4.9)	.250 (6.4)	.262 (6.7)	13.6 (345.4)	40 (178)	INTERMEDIATE	.34 (153.2)

*SEE www.panduit.com FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE, PART MATERIAL, PART COLOR AND ANY THIRD PARTY RECOGNITION OR COMPLIANCE.

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	TITLE	DRAWING NUMBER
							CBR SERIES CABLE TIE	
							CUSTOMER DRAWING	
							ITEM REVISION NAME	
							10B0150T/02	
							DATASET FILE NAME	
							10B0150T_DC/02 - SS-27318_REV06	
6	6/16/17	BWG	MPH	JADE	ADDED CBR1.5/2M TIP DESIGN VIEWS. REVISED WEBSITE NOTE. REVISED DIM. "F" FOR CBR1.5M AND CBR2M.	013188/00	UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]	MATERIAL: NYLON 6.6
5	6/18/15	BWG	MPH	JADE	CORRECTED MATERIAL NOTE.	SS-27318/05	.x ± .01 [.25] .xxx ± .020 [.51] .xx ± .02 [.5] ANGLES ±	DRAWING NUMBER: SS-27318
4	11.18.14	BDK	MPH	JADE	UPDATED TITLE BORDER AND UPDATED NOTES	SS-27318	THIRD ANGLE PROJECTION	
							DRAWN BY JABO	
							DATE 6/22/01	
							CHK JRJR	
							SCALE NONE	
								SHT 1 OF 1
								A

D10100DA/16